


Cable inlet : 2-G1/2  
 Gasket material for electrode : FKM

11	Detection Electrode	1	316 stainless steel
10	Insulator	1	PTFE
9	Earth electrode	1	316 stainless steel
8	Mounting plug	1	316 stainless steel
7	Lock screw	1	Stainless steel (M4)
6	Housing	1	Aluminium die casting (ADC12):Epoxy coating
5	Tanper-proof bolt	1	Hex. socket bolt (M4)
4	Cover	1	Aluminium die casting (ADC12):Epoxy coating
3	Plastic plug	1	PP
2	Metal Plug	1	Stainless steel
1	Gasket	1	NBR
P.No.	Name	Qty.	Material

Wiring

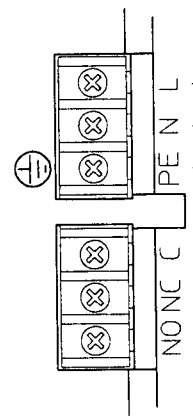

Contact rating  
 250V 3A AC  
 (Resistive load)

Power supply  
 100 - 240V AC  
 50/60 Hz

TITLE OUTLINE DRAWING FOR		CAPACITIVE PHASE LEVEL SENSOR	
MODEL		CG2N	
DRAWING NO.		SA901842	
DATE	06-09-'00	DR. BY	<i>[Signature]</i>
SCALE	N.T.S.	CH. BY	<i>[Signature]</i>
UNITS	MILLIMETERS	APP. BY	<i>[Signature]</i>
REV	DATE	DESCRIPTION	BY
REVISIONS			
NOHKEN		NOHKEN INC	
OSAKA, JAPAN		OSAKA, JAPAN	