
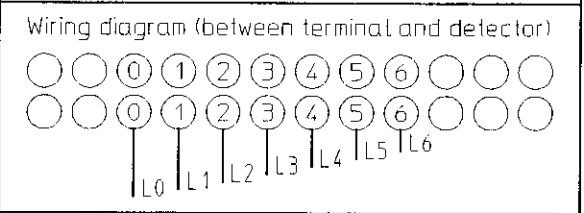
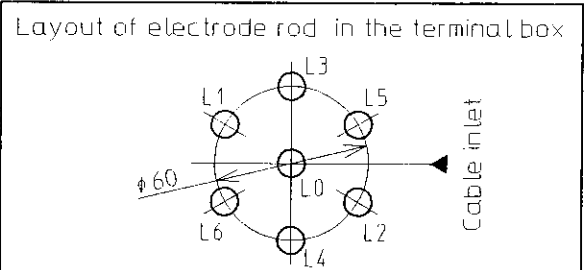


REVISIONS				
REV	DATE	DESCRIPTION	BY	APP. BY
△				
△				
△				

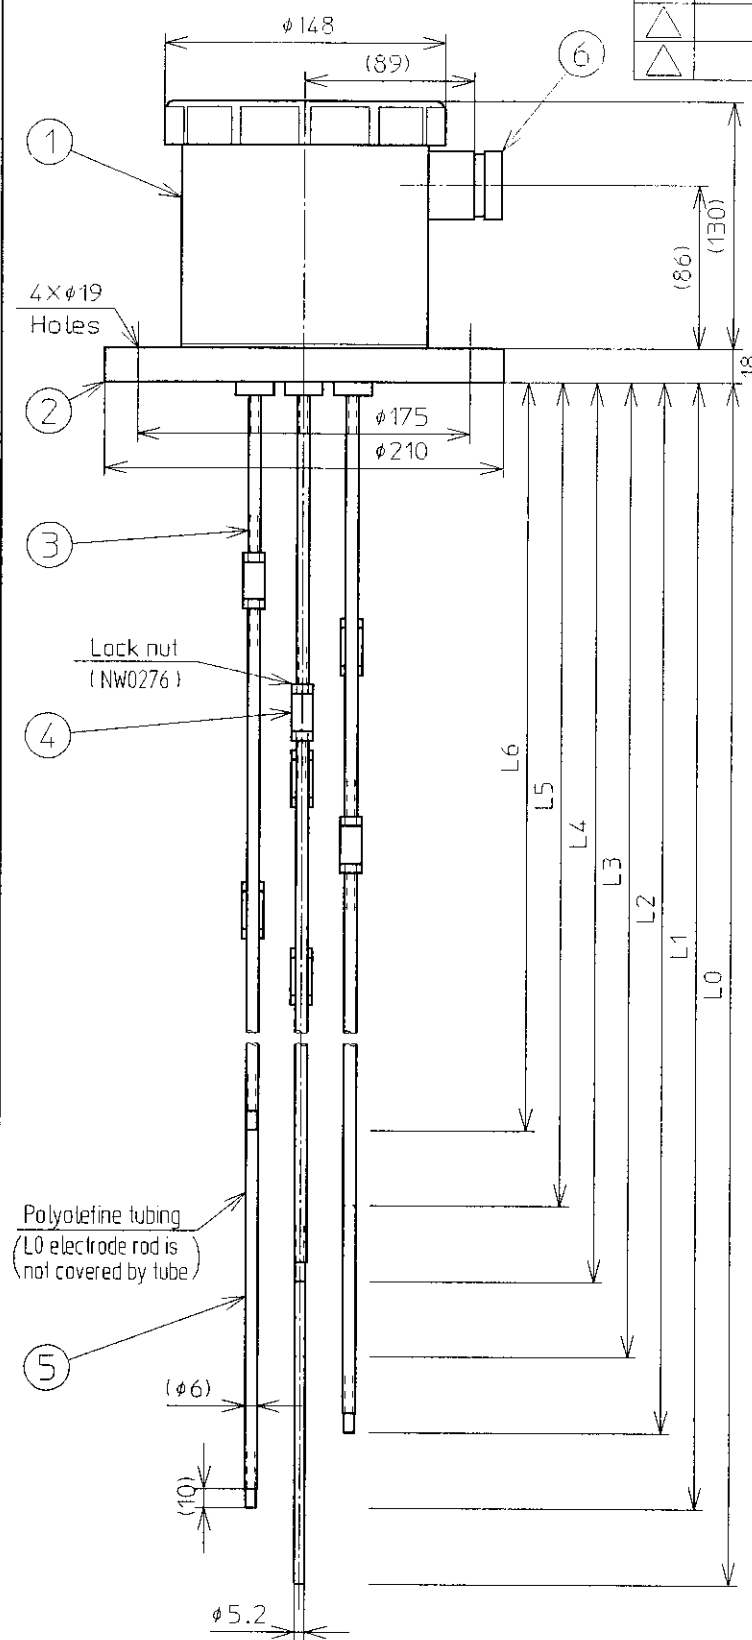

Tag No.			
L0			
L1			
L2			
L3			
L4			
L5			
L6			
Qty.			

Note  
 Lock nut : Two for each per connector

Flange size :Equivalent JIS 10K 100A Proviso 4 holes  
 Cable inlet :Equivalent JIS F 20a(G3/4)

6	Cable gland	1	Brass (C3604BD, Nickel plating)
5	Outside electrode rod		NW0276 (Equivalent Hastelloy C)
4	Connector		NW0276 (Equivalent Hastelloy C)
3	Inside electrode rod	7	NW0276 (Equivalent Hastelloy C)
2	Flange	1	PVC
1	Terminal box	1	ABS
P.No.	Name	Qty.	Material

DATE	2005-10-18	DR. BY	G. Bancho
SCALE	N.T.S.	CH. BY	H. Murokoshi
UNITS	MILLIMETERS	APP. BY	T. Kawabata

TITLE	OUTLINE DRAWING OF ELECTRODE LEVEL SENSOR		
MODEL	FE3C-7		
DRAWING NO.	AS 009095 △		



**NOHKEN INC.**  
 OSAKA, JAPAN