
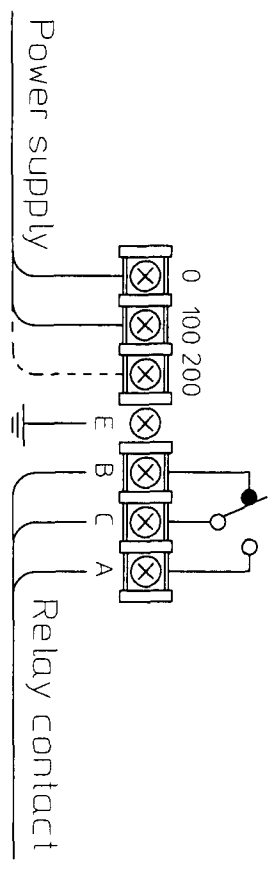


Terminal connection

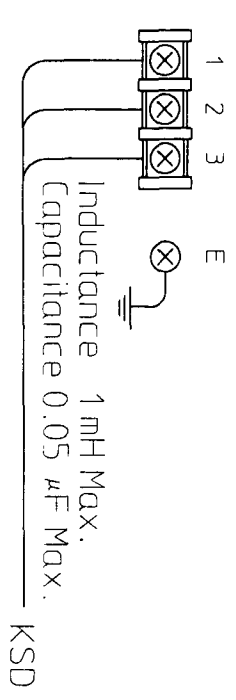

Specification

1. Intrinsically safe construction : i 3nG5
2. Power supply : 100/200 V AC ± 10 % 50/60 HZ
3. Contact rating : 250 V 2 A AC (Resistive load)  
30 V 2 A DC (Resistive load)
4. Case material : SS400
5. Case color : Munsell painting N7

DRAWING NO. SA 902225

REV	DATE	DESCRIPTION	BY	APP. BY

DATE	07-19-'01	DR. BY	<i>K. Kato</i>
SCALE	N.T.S.	CH. BY	<i>M. Mori</i>
UNITS MILLIMETERS		APP. BY	<i>M. Mori</i>

TITLE	OUTLINE DRAWING OF CAPACITIVE LEVEL SENSOR	
MODEL	KSI	
DRAWING NO.	SA 902225	



**NOHKEN INC.**  
OSAKA, JAPAN

