



NOHKEN INC.
15-32, Hiroshiba-cyo, Suita-city, Osaka, 564-0052, Japan
TEL: (81) 6-6386-8149 FAX: (81) 6-6386-8307
E-mail: Overseas.dept@nohken.co.jp Web: www.nohken.com


Model PL2500

Distributor for 2-wire Transmitter

Specifications

PL2500

Supply power	: 85 to 264 V AC, 50/60 Hz (24 V DC optional)
Power spruce for PK	: 24 V DC
Power consumption	: Approx. 3 VA at 20 mA DC output
Accuracy	: ± 0.2 % F.S. (at gain = 1.0)
Input signal	: 4 to 20 mA DC (2-wire)
Output signal	: 4 to 20 mA DC
Gain	: 1 to 5 times
Resistive load	: 550 Ω Max.
Operating Temp.	: -5 to +55 $^{\circ}$ C
Material	: PBT
Mounting	: DIN Rail mounting (35 mm)

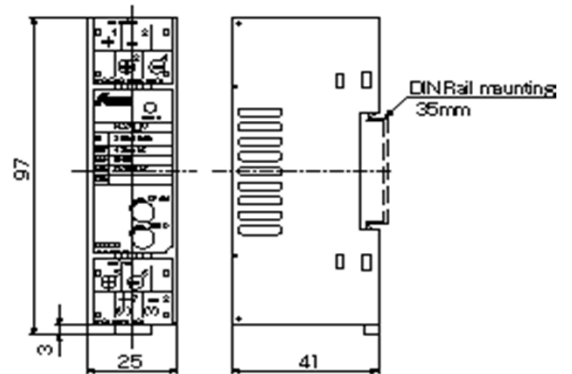

* The specifications are subject to change without notice.